

YOKOHAMA

MOTORSPORT TYRES 2023



ADVAN



ROAD LEGAL SPORT TYRES

The A052 features an all new 'Sport compound'. Road legal competition tyre offering controlled handling and extreme grip. Motorsport UK - Tyre List 1B.



ADVAN
A052

EU Label Range

Fuel Efficiency Class	D
Wet Grip Class	A-C
External Rolling Noise Class and Measured Value (dB)	B 69-73
Series: 30% - 60%	inches: 20 - 13

POSITIONING MAP



INCH	SERIES (%)	SIZE	ARTICLE	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH	EU Labels	Cat.		
20	40	255/40ZR20 (101Y) XL	R4497	712	260	9	8.5J ~ 10J	10	D B B/73	- - C1		
		235/35ZR20 (92Y) XL	R7465	671	240	8.5	8J - 9.5J	8.5	D B B/72	- - C1		
		245/35ZR20 (95Y) XL	R5925	680	248	8.5	8J ~ 9.5J	8.5	D B B/71	- - C1		
		265/35ZR20 (99Y) XL	R7464	695	269	9.5	9J ~ 10.5J	9.5	D B B/73	- - C1		
		285/35ZR20 (104Y) XL	R4498	708	290	10	9.5J ~ 11J	11	D B B/73	- - C1		
	30	245/30ZR20 (90Y) XL	R5924	656	248	8.5	8J ~ 9J	8.5	D B B/71	- - C1		
		265/30ZR20 (94Y) XL	R7463	695	269	9.5	9J ~ 10.5J	9.5	D B B/73	- - C1		
		295/30R20 101Y XL	R7033	686	301	10.5	10J ~ 11J	10.5	D B B/73	- - C1		
		19	40	235/40ZR19 (96Y) XL	R5929	671	241	8.5	8J ~ 9.5J	8.5	D B B/71	- - C1
				265/40ZR19 (102Y) XL	R5931	695	271	9.5	9J ~ 10.5J	9.5	D B B/73	- - C1
235/35ZR19 (91Y) XL	R7467			646	239	8.5	8J - 9.5J	8.5	D B B/72	- - C1		
245/35ZR19 (93Y) XL	R4965			655	248	8.5	8J - 9.5J	8.5	D B B/71	- - C1		
255/35ZR19 (96Y) XL	R5927			661	260	9	8.5J ~ 10J	9	D B B/73	- - C1		
35	265/35ZR19 (98Y) XL		R7466	671	267	9.5	9J ~ 10.5J	9.5	D B B/73	- - C1		
	275/35ZR19 (100Y) XL		R5928	675	278	9.5	9J ~ 11J	9.5	D B B/73	- - C1		
	295/35R19 104Y XL		R7034	689	301	10.5	10J ~ 11.5J	10.5	D B B/73	- - C1		
	265/30ZR19 (93Y) XL		R6499	645	266	9.5	9J - 10J	9.5	D B B/73	- - C1		
	18		45	235/45R18 98Y XL	R4486	669	236	8	7.5J ~ 9J	9	D B B/71	- - C1
265/45R18 104Y XL		R4485		695	266	9	8.5J ~ 10J	10	D B B/73	- - C1		
225/40R18 92Y XL		R0962		637	230	8	7.5J ~ 9J	9	D A B/71	- - C1		
235/40R18 95Y XL		R0961		645	241	8.5	8J ~ 9.5J	9.5	D A B/71	- - C1		
245/40R18 97Y XL		R0960		653	248	8.5	8J ~ 9.5J	9.5	D A B/71	- - C1		
40		255/40R18 99Y XL	R0959	661	260	9	8.5J ~ 10J	10	D A B/73	- - C1		
		265/40R18 101Y XL	R0958	669	271	9.5	9J ~ 10.5J	10.5	D A B/73	- - C1		
		275/40R18 103Y XL	R4484	677	278	9.5	9J ~ 11J	11	D B B/73	- - C1		
		225/35R18 87Y XL	R4483	615	230	8	7.5J ~ 9J	9	D B B/71	- - C1		
		255/35R18 94Y XL	R0957	635	260	9	8.5J ~ 10J	10	D A B/73	- - C1		
17	35	265/35R18 97Y XL	R0956	643	271	9.5	9J ~ 10.5J	10.5	D A B/73	- - C1		
		295/35R18 103Y XL	R0955	663	301	10.5	10J ~ 11.5J	11	D A B/73	- - C1		
		295/30R18 98Y XL	R0954	635	301	10.5	10J ~ 11J	11	D A B/73	- - C1		
		315/30R18 98Y	R0953	647	320	11	10.5J ~ 11.5J	11.5	D A B/73	- - C1		
		40	205/45R17 88W XL	R2095	616	206	7	6.5J ~ 7.5J	7.5	D A B/71	- - C1	
	215/45R17 91W XL		R0966	626	213	7	7.5J ~ 8J	8	D A B/71	- - C1		
	225/45R17 94W XL		R0965	634	225	7.5	7J ~ 8.5J	8.5	D A B/71	- - C1		
	235/45R17 97W XL		R0964	644	236	8	7.5J ~ 9J	9	D A B/71	- - C1		
	205/40R17 84W XL		R4489	596	212	7.5	7J ~ 8J	8	D B B/71	- - C1		
	16	50	215/40R17 87W XL	R4488	604	218	7.5	7J ~ 8.5J	8.5	D B B/71	- - C1	
245/40R17 95W XL			R4487	628	248	8.5	8J ~ 9.5J	9.5	D B B/71	- - C1		
255/40R17 98W XL			R0963	636	260	9	8.5J ~ 10J	10	D A B/73	- - C1		
205/55R16 94W XL			R0970	632	214	6.5	5.5J ~ 7.5J	7.5	D A B/71	- - C1		
195/50R16 88W XL			R4492	602	201	6	5.5J ~ 7J	7	D B B/71	- - C1		
15	45	205/50R16 91W XL	R0969	612	214	6.5	5.5J ~ 7.5J	7.5	D A B/71	- - C1		
		225/50R16 96W XL	R0968	632	233	7	6J ~ 8J	8	D A B/71	- - C1		
		195/45R16 84W XL	R4491	582	195	6.5	6J ~ 7.5J	7.5	D B B/71	- - C1		
		225/45R16 93W XL	R0967	608	225	7.5	7J ~ 8.5J	8.5	D A B/71	- - C1		
		245/45R16 94W	R4490	626	243	8	7.5J ~ 9J	9	D B B/71	- - C1		
14	55	195/55R15 89V XL	R4496	595	201	6	5.5J ~ 7J	7	D B B/71	- - C1		
		195/50R15 86V XL	R4495	577	201	6	5.5J ~ 7J	7	D B B/71	- - C1		
		205/50R15 89V XL	R4494	587	214	6.5	5.5J ~ 7.5J	7.5	D B B/71	- - C1		
		225/50R15 95V XL	R4493	607	233	7	6J ~ 8J	8	D B B/71	- - C1		
		185/60R14 86V XL	R6717	578	189	5.5	5J ~ 6.5J	6.5	D B B/69	- - C1		
13	60	185/55R14 80V	R4477	560	194	6	5J ~ 6.5J	6.5	D B B/69	- - C1		
		185/60R13 80V	R6087	552	189	5.5	5J ~ 6.5J	6.5	D B B/69	- - C1		
		205/60R13 86V	R6716	576	209	6	5.5J ~ 7.5J	7.5	D C B/69	- - C1		

ADVAN
A032R

Yokohama's A032-R The 'Aqua-Tusk' tread design also helps to increase traction in the wet. Motorsport UK - Tyre List 1B.

Fuel Efficiency Class
The fuel efficiency class ranges from A (most efficient) to E (least efficient). A top class tyre has less rolling resistance and therefore requires less energy to move the vehicle. This translates into lower energy costs (fossil fuels or electricity).

Wet Grip Class
The wet grip describes a tyre's performance under wet conditions and its classes ranges as well from A (shorter braking distance on wet asphalt) to E (longest).

External Rolling Noise Class and Measured Value (dB)
The external rolling noise class ranges from A (less noise outside the vehicle) to C (highest noise). The external rolling noise, caused by tyres, is measured in decibels. This noise is different from the "cavity noise", which is the noise transmitted from the rims to the interior of the car.

Tyres suitable for severe snow conditions bear the snow grip pictogram ("3 peaks and snowflake") or "alpine" symbol that is also present on the sidewall of such tyres. Nordic winter tyres (tyre class C1) for use on iced surfaces will feature a symbol (ice grip pictogram) that represents an ice studgrip.

INCH	SERIES (%)	SIZE	ARTICLE	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH	EU Labels	Cat.
10	70	*165/70R10 72H	K4603	486	170	4	4~5.5	5~5.5	- - -/ - - -	C1

* = No EU Labelling Data required

For information about the start and end date of production of these tyres, information about the tyre type identifier and further technical aspects, please refer to the official product information sheet, which can be provided to you by your tyre dealer. A link to the public part of the European product database for Energy Labelling (EPREL), where you can access the product information sheet and the EU tyre label, is also provided via the YOKOHAMA website (www.yokohama.co.uk).

RACING TYRES



RADIAL

ADVAN
A005

ADVAN
A006



A006F/A006Y

A006N

A006G/A006C

for **GT CARS**

INCH	SIZE	COMPOUND			OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		A40	A60	A80				
19	330/710R19	N2894			708	339	350	13
	310/690R19	N3129			687	271	298	11
	300/690R19	N3143			687	268	293	10.5
	260/660R19	N3004			660	228	250	9
	240/660R19	N3130			655	214	230	8
18	330/710R18	N2888	N2889	N2890	708	338	355	13
	280/710R18	N3114 N3142			709	261	301	11
	300/680R18	N2855	N2856	N2857	682	308	332	12
	280/680R18	N2270	N3113	N2595	682	284	299	11
	320/650R18	N3139			654	325	341	13
	300/650R18	N2844	N2845	N2846	650	305	330	12
	280/650R18	N3141	N3066	N3063	649	287	303	11
	250/650R18	N2472	N2596	N2372	650	269	273	10
	250/640R18	N3140			640	253	270	9.5
	240/640R18	N2506 N2708			640	239	244	9

INCH	SIZE	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		W60				
19	330/710R19	N2793	709	333	345	13
	310/690R19	N2939	689	271	299	11
	300/690R19	N2908	689	268	291	10.5
	260/660R19	N2937	662	228	249	9
	240/660R19	N2907	657	214	229	8
18	320/710R18	N2924	709	333	353	13
	280/710R18	N2807	709	281	304	11
	300/680R18	N2791	683	308	331	12
	280/680R18	N2784	684	277	303	11
	300/650R18	N2790	653	312	328	12
	280/650R18	N2923	651	278	301	11
	250/650R18	N2320	653	250	270	10
	250/640R18	N2704	644	253	264	9.5
240/640R18	N2502	644	220	243	9	

for **TOURING CARS**

INCH	SIZE	COMPOUND			OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		S	M	H				
18	260/670R18	N2698 N2570			672	265	269	9.5
	250/660R18	N2401 N2915			657	265	265	9.5
	230/650R18	N2391 N2090			650	229	247	9
17	260/640R17	N2392 N2393			640	253	275	10
	240/640R17	N2394 N2395			640	233	253	9
	240/610R17	N3003	N2756		609	235	248	9
	230/610R17	N2912	N2794	N2795	607	231	240	9
	210/610R17	N2203	N2614	N2202	608	222	224	8
16	210/580R16	N2465			580	216	227	8
	190/580R16	N2454 N2455			581	196	203	7
15	190/580R15	N3282 N3283			576	206	216	7
	190/560R15	N2379 N2466			561	196	208	7
14	180/530R14	N2380 N1608			535	180	191	6.5

INCH	SIZE	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		H				
18	250/660R18	N2403	654	246	259	9.5
	230/650R18	N2082	650	235	247	9
17	260/640R17	N2397	639	253	273	10
	240/640R17	N2398	640	229	249	9
	240/610R17	N2757	607	232	247	9
	230/610R17	N2337	607	236	244	9
	210/610R17	N2610	612	212	222	8
16	190/580R16	N2456	578	194	206	7
15	190/580R15	N2148	578	194	210	7
	190/560R15	N2457	560	199	209	7



Robin Shute, 2022 Pikes Peak overall champion. Photo by Larry Chen





for FORMULA CARS

ADVAN A005/SLICK		DESIGN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
INCH	SIZE						
13	240/45VR13	N3006	S	577	260	278	10
	200/50VR13	N3005	S	556	210	244	9
	180/50VR13	N3048	S	556	180	224	8

ADVAN A006/RAIN		DESIGN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
INCH	SIZE						
13	240/45VR13	A006C N3127	S	579	260	276	10
	200/50VR13	A006C N3126	S	557	210	244	9
	180/50VR13	A006C N2132	S	557	200	221	8

for HISTORIC CAR

ADVAN A005/SLICK		DESIGN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH	
INCH	SIZE							
13	160/520R13	A005	N2669	*N2701	523	160	186	6

* ADVAN A005 for hand-cut groove. The RAIN compound is only for RAIN conditions. Please do not use it under SLICK conditions. Please be sure to hand-cut the groove before use.

ADVAN A054



for HILL CLIMB

ADVAN A005/SLICK		DESIGN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH	
INCH	SIZE							
14	190/530R14	A005	N2673	SS	529	185	196	7

for RALLY-CROSS

ADVAN A054		DESIGN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH	
INCH	SIZE							
17	230/640R17	A054	M	N3034	646	232	237	8

A brief History of Motorsport: Winning in Red and Black



YOKOHAMA has been active in Motorsports for over half a century. Right from the beginning, we adopted a simple yet stunning black and red combination as our team colours. The combination represents our passion (red) and the asphalt (black) of the race track. The colouring became known as the "Red in Black ADVAN Colour". Going forward, Motorsports will remain one of our core corporate activities, as we see the race track as an important venue for technological development as well as the ideal place to display the YOKOHAMA fighting spirit. YOKOHAMA is truly a household name within Motorsports and its range of ADVAN Tyres can provide the Control Tyre for World Championships and International top level Motorsport competitions.

YOKOHAMA, AS ONE OF THE LEADING TYRE MANUFACTURERS IN THE WORLD, IS AND HAS BEEN INVOLVED AT THE VERY TOP LEVEL OF PROFESSIONAL MOTORSPORTS AS OFFICIAL TYRE SUPPLIER FOR A WIDE RANGE OF CHAMPIONSHIPS AROUND THE WORLD.

RALLY TYRES

ADVAN
A053



INCH	SIZE	COMPOUND						OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		P30		P50		P70					
		LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT				


15	180/650R15	N3125	N3124	N3123	N3122	N3121	N3120	648	180	224	7
----	------------	-------	-------	-------	-------	-------	-------	-----	-----	-----	---

INCH	SIZE	COMPOUND						OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		A30		A50		A70					
		LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT				

15	180/650R15	N3027	N3028	N3029	N3030	N3031	N3032	648	180	224	7
	170/650R15 *	N3021	N3022	N3023	N3024	N3025	N3026	644	172	224	7
	160/640R15	N3194	N3195	N3196	N3197	N3198	N3199	642	157	202	6
	150/625R15	N3017	N3018	N3019	N3020			625	150	198	6

LEFT = A053L, RIGHT = A053R * = Gravel Rally for S2000

Road Surface Application Chart



ADVAN
A035




INCH	SERIES (%)	SIZE	COMPOUND			OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
			A30	A50	A70				

15	60	185/60R15 84Q	N2434	N2433		600	150	190	5.5
14	65	175/65R14 82Q	N1996	N1997		596	147	182	5
		185/65R14 86Q	N1993	N1994	* N1995	600	150	194	5.5
13	65	165/65R13 77Q	N2010	N2011		551	138	172	5
	70	185/70R13 86Q	N2105	N2068		600	150	196	5.5

* : NO BAR-CODE

A053/A035 COMPOUND MAP

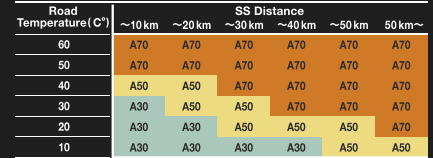

ADVAN
A036



INCH	SERIES (%)	SIZE	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH

15	60	185/60R15 84Q	N2446	601	187	206	6.5
	65	205/65R15 94Q	N2447	648	206	224	7


ADVAN
A051T




INCH	SIZE	COMPOUND			OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		SS	S	M				

18	210/650R18	N2934	N2935	N2936	648	208	224	8
17	210/625R17	N3035	N3036	N3037	624	209	221	8
	190/625R17	N2974	N2975	N2976	625	185	200	7
16	190/600R16	N2955	N2956	N2957	600	185	198	6.5
15	190/580R15	N3038	N3039	N3040	581	186	196	6.5

Hand-cut Groove Recommendation



A051T COMPOUND MAP

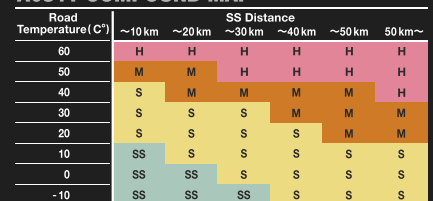

SPORT TYRES FOR TRACK USE ONLY

ADVAN
A048




A048

ADVAN
A021R



A021R

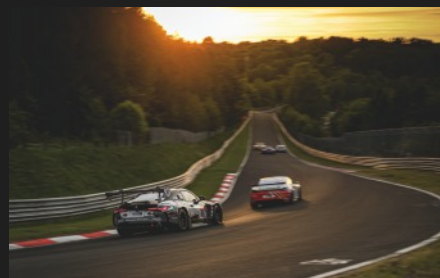

INCH	SIZE	DESIGN	COMPOUND	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH	REFERENCE SIZE
			M						
15	190/580R15	A048	N2960	574	202	6	5.5~7	6.5	195/50R15
14	180/560R14	A048	N2963	557	197	6	5~6.5	6.5	185/55R14
	170/580R14	A048	N2964	575	189	5.5	5~6.5	6.5	185/60R14
13	190/580R13	A048	N2967	573	210	6	5.5~6.5	6.5	205/60R13
	170/550R13	A048	N2968	550	188	5.5	5~6.5	6	185/60R13
	170/560R13	A021R	N2969	557	182	5.5	5~6.5	6~6.5	185/60R13
	160/540R13	A048	N2970	536	180	5	5~6	6	175/60R13

YOKOHAMA USER INFORMATION

YOKOHAMA is the name that should come to mind for the racing enthusiasts that want the best tyre to meet their needs. We offer a wide range of tyres for almost every automotive competition. Regardless of your area of interest, we have teams of professionals working year-round in the development, testing and manufacture of new tyre designs that provide the additional edge you need to lead field.

Tyre Use

YOKOHAMA Motorsports tyres are manufactured solely for competition. Although some of the models can be used on public roads, the tyres are produced with specially designed patterns and compounds, and they are not suitable for public road use. YOKOHAMA recommends using YOKOHAMA Motorsports tyres only for the intended uses for each pattern, and please remember such tyres are made for competition and therefore carry no warranty.

Tyre Size Designation

Tyre size designation shows normal tread width in mm / overall tyre diameter in mm and nominal rim diameter in inch (e.g.230/610R17). The dimensions of a competition tyre are given as an inflated tyre with unloaded conditions.

Tyre Care

Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders, etc. Tyres should preferably be stored in a cool, dry and dark room with a controlled environment.

Mounting

Motorsports tyres require special care when being mounted, as the bead must seat perfectly onto the rim without causing any damage. Wheels should be checked for damage or rust before mounting as such items may result in a poor fit that is not airtight. In order to assure that there is no damage to the bead area, you should always have your tyres mounted by a certified dealership that knows how to handle tyres made for competition. You should always use a mounting machine when changing a tyre to prevent unnecessary damage to the tyre or wheels. You should always use a safety cage when inflating tyres. Failure to do so may result in serious injury. Do not inflate a tyre to more than 40 psi (275 kPa).

Air Pressure

You should never over- or under-inflate a tyre as this may cause severe damage to tyres and /or rims when accelerating, braking or cornering. Never use tyres with under 19 psi (130 kPa). The correct tyre inflation pressure is an important requirement for the tyre to obtain its peak tread life and performance characteristics. Under inflation causes excessive heat, reduces load carrying capacity, increases tread wear which results in a loss of performance. Whilst over inflation results in irregular wear rates, rapid wear in the centre of the tyre and light steering characteristics. It's recommended that all tyres are pressured from cold.

Remember that the proper pressure depends on the type of race, road surface conditions and driver's needs

Fuel saving and road safety depend heavily on the behaviour of drivers and in particular on the following: eco driving can significantly reduce fuel consumption; tyre pressure needs to be regularly checked to optimise fuel efficiency and wet grip; stopping distances must always be respected. Ice grip tyres are specifically designed for road surfaces covered with ice and compact snow, and should only be used in very severe climate conditions (e.g. cold temperatures). Using ice grip tyres in less severe climate condition (e.g. wet conditions or warmer temperatures) could result in sub-optimal performance, in particular for wet grip, handling and wear.

SPECIALISED MOTORSPORT DEALERS



Historic / Race

ADAMS & PAGE

Cressex Industrial Est. Lincoln Road,
High Wycombe,
Bucks
HP12 3RQ
Tel: 01494 445 389
info@adamsandpage.co.uk
www.adamsandpage.co.uk

Race / Rally

DEMON TWEEDS

75 Ash Road South,
Wrexham Industrial Est.,
Wrexham, Clwyd
LL13 9UG
Tel: 01978 664 466
wheels@demon-tweeds.co.uk
www.demon-tweeds.co.uk

Rally / Race Scotland

WHEELS AROUND

21 Feus,
Auchteradar,
Perthshire
PH3 1EP
Tel: 07711 577148
fiona@wheelsaround.com
www.wheelsaround.com

Rally / Race

MR TYRE (MOTORSPORT) LTD

Unit 1 Apex Centre, Lovell,
Litchfield Road Ind. Estate,
Tamworth
B79 7TA
Tel: 01827 211021
sales@mrtymotorsport.com
www.mrtymotorsport.co.uk

Race

DARKSIDE DEVELOPMENTS

Unit 1 Carbon Court,
Springvale Road,
Barnsley, South Yorkshire
S72 7FF
Tel: 01226 827999
sales@darksidedevelopments.co.uk
www.darksidedevelopments.co.uk

Oval / Race / Hillclimb

GEORGE POLLEY M/SPORT

Wimblington Road,
Manea,
Cambridgeshire
PE15 0JR
Tel: 01354 688 111
sales@polleymotorsport.co.uk
www.polleymotorsport.co.uk

Rally / Race Ireland

MURRAY MOTORSPORT

Unit 21,
Beechlawn Ind. Estate,
Greenhills Road
Dublin 12
Tel: +353 1 4500 555
info@murraymotorsports.ie
www.murraymotorsport.com

Rally / Race

MINISPORT LIMITED

Thompson Street,
Padham,
Lancashire
BB12 7AP
Tel: 01282 778 731
sales@minisport.com
www.minisport.com

DEALER STAMP



For further details of Yokohama UK's full range of race proven motorsport tyres, please contact our helpline: Tel: +44 (0) 1908 625 625

motorsport@yokohama.co.uk
www.yokohama.co.uk
YOKOHAMA (UK)
Dawson Rd, Mount Farm, Bletchley, Milton Keynes MK1 1QY