



YOKOHAMA

UK MOTORSPORT TYRES 2022



ADVAN

For information about the EU Tyre Label, tyre labelling data and further technical details, see the corresponding sections inside this catalogue or refer to the YOKOHAMA website www.yokohama.co.uk



ROAD LEGAL SPORT TYRES

Yokohama's A032-R has a multi-radius tread profile, symmetric tread pattern and advanced high grip tread compound which improve braking and cornering performance. The 'Aqua-Tusk' tread design also helps to increase traction in the wet. Motorsport UK - Tyre List 1B.



**ADVAN
A032R**

Fuel Efficiency Class
The fuel efficiency class ranges from A (most efficient) to E (least efficient). A top class tyre has less rolling resistance and therefore requires less energy to move the vehicle. This translates into lower energy costs (fossil fuels or electricity).

Wet Grip Class
The wet grip describes a tyre's performance under wet conditions and its classes ranges as well from A (shorter braking distance on wet asphalt) to E (longest).

External Rolling Noise Class and Measured Value (dB)
The external rolling noise class ranges from A (less noise outside the vehicle) to C (highest noise). The external rolling noise, caused by tyres, is measured in decibels. This noise is different from the "cavity noise", which is the noise transmitted from the rims to the interior of the car.

Tyres suitable for severe snow conditions bear the snow grip pictogram ("3 peaks and snowflake") or "alpine" symbol that is also present on the sidewall of such tyres. Nordic winter tyres (tyre class C1) for use on iced surfaces will feature a symbol (ice grip pictogram) that represents an ice stalagmite.

INCH	SERIES (%)	SIZE	ARTICLE	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH						Cat.
10	70	*165/70R10 72H	K4603	486	170	4	4~5.5	5~5.5	-	-	-/-	-	-	C1

* = No EU Labelling Data required

The A052 features an all new 'Sport compound'. Road legal competition tyre offering controlled handling and extreme grip. Motorsport UK - Tyre List 1B.

EU Label Range

Fuel Efficiency Class	D
Wet Grip Class	A-C
External Rolling Noise Class and Measured Value (dB)	B 69-73
Series: 30% - 60%	inches: 20 - 13

POSITIONING MAP



**ADVAN
A052**

INCH	SERIES (%)	SIZE	ARTICLE	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH						Cat.
20	40	255/40ZR20 (101Y) XL	R4497	712	260	9	8.5J ~ 10J	10	D	B	73/B	-	-	C1
		245/35ZR20 (95Y) XL	R5925	680	248	8.5	8J ~ 9.5J	-	D	B	71/B	-	-	C1
		285/35ZR20 (104Y) XL	R4498	708	290	10	9.5J ~ 11J	11	D	B	73/B	-	-	C1
	30	245/30ZR20 (90Y) XL	R5924	656	248	8.5	8J ~ 9J	-	D	B	71/B	-	-	C1
		295/30R20 101Y XL	R7033	686	301	10.5	10J ~ 11J	-	D	B	73/B	-	-	C1
		235/40ZR19 (96Y) XL	R5929	671	241	8.5	8J ~ 9.5J	-	D	B	71/B	-	-	C1
19	40	265/40ZR19 (102Y) XL	R5931	695	271	9.5	9J ~ 10.5J	-	D	B	73/B	-	-	C1
		245/35ZR19 (93Y) XL	R4965	655	248	8.5	8J-9.5J	9.5	D	B	71/B	-	-	C1
		255/35ZR19 (96Y) XL	R5927	661	260	9	8.5J ~ 10J	-	D	B	73/B	-	-	C1
	35	275/35ZR19 (100Y) XL	R5928	675	278	9.5	9J ~ 11J	-	D	B	73/B	-	-	C1
		295/35R19 104Y XL	R7034	689	301	10.5	10J ~ 11.5J	-	D	B	73/B	-	-	C1
		235/45R18 98Y XL	R4486	669	236	8	7.5J ~ 9J	9	D	B	71/B	-	-	C1
18	45	265/45R18 104Y XL	R4485	695	266	9	8.5J ~ 10J	10	D	B	73/B	-	-	C1
		225/40R18 92Y XL	R0962	637	230	8	7.5J ~ 9J	9	D	A	71/B	-	-	C1
		235/40R18 95Y XL	R0961	645	241	8.5	8J ~ 9.5J	9.5	D	A	71/B	-	-	C1
	40	245/40R18 97Y XL	R0960	653	248	8.5	8J ~ 9.5J	9.5	D	A	71/B	-	-	C1
		255/40R18 99Y XL	R0959	661	260	9	8.5J ~ 10J	10	D	A	73/B	-	-	C1
		265/40R18 101Y XL	R0958	669	271	9.5	9J ~ 10.5J	10.5	D	A	73/B	-	-	C1
		275/40R18 103Y XL	R4484	677	278	9.5	9J ~ 11J	11	D	B	73/B	-	-	C1
		225/35R18 87Y XL	R4483	615	230	8	7.5J ~ 9J	9	D	B	71/B	-	-	C1
		255/35R18 94Y XL	R0957	635	260	9	8.5J ~ 10J	10	D	A	73/B	-	-	C1
	35	265/35R18 97Y XL	R0956	643	271	9.5	9J ~ 10.5J	10.5	D	A	73/B	-	-	C1
		295/35R18 103Y XL	R0955	663	301	10.5	10J ~ 11.5J	11	D	A	73/B	-	-	C1
		295/30R18 98Y XL	R0954	635	301	10.5	10J ~ 11J	11	D	A	73/B	-	-	C1
		315/30R18 98Y	R0953	647	320	11	10.5J ~ 11.5J	11.5	D	A	73/B	-	-	C1
		205/45R17 88W XL	R2095	616	206	7	6.5J ~ 7.5J	7.5	D	A	71/B	-	-	C1
		215/45R17 91W XL	R0966	626	213	7	7.5J ~ 8J	8	D	A	71/B	-	-	C1
	40	225/45R17 94W XL	R0965	634	225	7.5	7J ~ 8.5J	8.5	D	A	71/B	-	-	C1
		235/45R17 97W XL	R0964	644	236	8	7.5J ~ 9J	9	D	A	71/B	-	-	C1
		205/40R17 84W XL	R4489	596	212	7.5	7J ~ 8J	8	D	B	71/B	-	-	C1
215/40R17 87W XL		R4488	604	218	7.5	7J ~ 8.5J	8.5	D	B	71/B	-	-	C1	
245/40R17 95W XL		R4487	628	248	8.5	8J ~ 9.5J	9.5	D	B	71/B	-	-	C1	
255/40R17 98W XL		R0963	636	260	9	8.5J ~ 10J	10	D	A	73/B	-	-	C1	
16	55	205/55R16 94W XL	R0970	632	214	6.5	5.5J ~ 7.5J	7.5	D	A	71/B	-	-	C1
		195/50R16 88W XL	R4492	602	201	6	5.5J ~ 7J	7	D	B	71/B	-	-	C1
		205/50R16 91W XL	R0969	612	214	6.5	5.5J ~ 7.5J	7.5	D	A	71/B	-	-	C1
	45	225/50R16 96W XL	R0968	632	233	7	6J ~ 8J	8	D	A	71/B	-	-	C1
		195/45R16 84W XL	R4491	582	195	6.5	6J ~ 7.5J	7.5	D	B	71/B	-	-	C1
		225/45R16 93W XL	R0967	608	225	7.5	7J ~ 8.5J	8.5	D	A	71/B	-	-	C1
245/45R16 94W	R4490	626	243	8	7.5J ~ 9J	9	D	B	71/B	-	-	C1		
15	55	195/55R15 89V XL	R4496	595	201	6	5.5J ~ 7J	7	D	B	71/B	-	-	C1
		195/50R15 86V XL	R4495	577	201	6	5.5J ~ 7J	7	D	B	71/B	-	-	C1
	205/50R15 89V XL	R4494	587	214	6.5	5.5J ~ 7.5J	7.5	D	B	71/B	-	-	C1	
225/50R15 95V XL	R4493	607	233	7	6J ~ 8J	8	D	B	71/B	-	-	C1		
14	60	185/60R14 86V XL	R6717	578	189	5.5	5J ~ 6.5J	-	D	B	69/B	-	-	C1
	55	185/55R14 80V	R4477	560	194	6	5J ~ 6.5J	6.5	D	B	69/B	-	-	C1
13	60	185/60R13 80V	R6087	552	189	5.5	5J ~ 6.5J	-	D	B	69/B	-	-	C1
	205/60R13 86V	R6716	576	209	6	5.5J ~ 7.5J	-	D	C	69/B	-	-	C1	

For information about the start and end date of production of these tyres, information about the tyre type identifier and further technical aspects, please refer to the official product information sheet, which can be provided to you by your tyre dealer. A link to the public part of the European product database for Energy Labelling (EPREL), where you can access the product information sheet and the EU tyre label, is also provided via the YOKOHAMA website (www.yokohama.co.uk).

SPORT TYRES FOR TRACK USE ONLY



ADVAN A021R

The A021-R is the high grip tyre for wet weather performance and is a superb all round performer on track and special stage. It has increased tread gauge. Motorsport UK - Tyre List 1C.

INCH	SIZE	DESIGN	M COMPOUND Article no.	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH	REFERENCE SIZE
13	170/560R13	A021R	N2969	557	182	5.5	5~6.5	6~6.5	185/60R13
	170/590R13	A021R	N2971	589	185	5.5	4.5~6	6	185/70R13



ADVAN A048

The A048 utilises a single block tread design for improved footprint and stiffness which provides enhanced steering response and cornering stability. A tried and tested tyre in all kinds of competition. Motorsport UK - Tyre List 1C.

INCH	SIZE	DESIGN	M COMPOUND Article no.	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH	REFERENCE SIZE
15	220/610R15	A048	N2958	603	235	7	6~8	8	225/50R15
	200/590R15	A048	N2959	584	215	6.5	5.5~7.5	7	205/50R15
	190/580R15	A048	N2960	574	202	6	5.5~7	6.5	195/50R15
	190/600R15	A048	N2961	593	202	6	5.5~7	6~7	195/55R15
	200/630R15	A048	N2962	625	208	6	5.5~7.5	7	205/60R15
14	170/580R14	A048	N2964	575	189	5.5	5~6.5	6.5	185/60R14
	180/560R14	A048	N2963	557	197	6	5~6.5	6.5	185/55R14
13	160/510R13	A048	N2966	505	180	5.5	5~6	6	175/50R13
	190/580R13	A048	N2967	573	210	6	5.5~6.5	6.5	205/60R13
	170/550R13	A048	N2968	550	188	5.5	5~6.5	6	185/60R13
	160/540R13	A048	N2970	536	180	5	5~6	6	175/60R13
12	150/490R12	A048	N2973	486	162	5	4.5~6	5.5	165/55R12



ADVAN A050

The A050 Features an enhanced tread design and carcass construction for superior performance on track. Featuring single block tread design for superior steering response and cornering stability. Motorsport UK - Tyre List 1C.

INCH	SIZE	DESIGN	M COMPOUND Article no.	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	SPEC RIM WIDTH	APPROVED RIM CONTOURS	RECOMMENDED RIM WIDTH	REFERENCE SIZE
17	250/625R17	A050	N3254	628	248	8.5	8 ~ 9.5	9.5	245/40R17
	210/625R17	A050	N3230	634	225	7.5	7 ~ 8.5	8.5	225/45R17
15	220/590R15	A050	N3211	587	214	6.5	5.5 ~ 7.5	7.5	205/50R15
	190/580R15	A050	N3210	577	201	6	5.5 ~ 7	6.5	195/50R15
14	170/580R14	A050	N3212	578	189	5.5	5 ~ 6.5	6.5	185/60R14
13	160/540R13	A050	N3213	540	177	5	5 ~ 6.5	6	175/60R13



RALLY TYRES



ADVAN
A035

The A035 asymmetrical gravel rally tyre. Has strong construction offered in a range of compounds providing a tyre suitable for the novice and the professional. Motorsport UK - Tyre List 6.

INCH	SERIES	SIZE	COMPOUND			OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
			A30	A50	A70				
15	60	185/60R15 84Q	N2434	N2433	-	600	150	190	5.5
	65	185/65R15 88Q	N2436	N2435	-	636	150	187	6
	65	195/65R15 91Q	N2437	-	-	646	162	203	6
14	65	175/65R14 82Q	N1996	N1997	-	596	147	182	5
13	65	165/65R13 77Q	*N2010	N2011	-	551	138	172	5
	70	185/70R13 86Q	*N2105	*N2068	-	600	150	196	5.5

* = NO BAR-CODE

A035 COMPOUND MAP

Road Temperature (C°)	SS Distance					
	~10 km	~20 km	~30 km	~40 km	~50 km	50 km~
60	A70	A70	A70	A70	A70	A70
50	A70	A70	A70	A70	A70	A70
40	A50	A50	A70	A70	A70	A70
30	A30	A50	A50	A70	A70	A70
20	A30	A30	A50	A50	A50	A70
10	A30	A30	A30	A30	A50	A50



ADVAN
A053

The latest asymmetrical/Directional Gravel Rally tyre to come from Yokohama is designed to give maximum performance on all loose surfaces. A great choice for both novice and professional drivers. Available in super-soft, soft and medium compounds. Motorsport UK - Tyre List 6.

INCH	SIZE	COMPOUND						OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		A30		A50		A70					
		LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT				
15	150/625R15	N3017	N3018	N3019	N3020	-	-	625	150	198	6
	160/640R15	N3194	N3195	N3196	N3197	-	-	642	157	202	6
	170/650R15*	N3021	N3022	N3023	N3024	N3025	N3026	644	172	224	7
	+180/650R15^	N3027	N3028	N3029	N3030	M3031	N3032	648	180	224	7

+ = LEFT-A053L, RIGHT-A053R

* = Gravel Rally for S2000


^ = Gravel Rally for Gr-N

A053 COMPOUND MAP

Road Temperature (C°)	SS Distance					
	~10 km	~20 km	~30 km	~40 km	~50 km	50 km~
60	A70	A70	A70	A70	A70	A70
50	A70	A70	A70	A70	A70	A70
40	A50	A50	A70	A70	A70	A70
30	A30	A50	A50	A70	A70	A70
20	A30	A30	A50	A50	A50	A70
10	A30	A30	A30	A30	A50	A50



Road Surface Application Chart

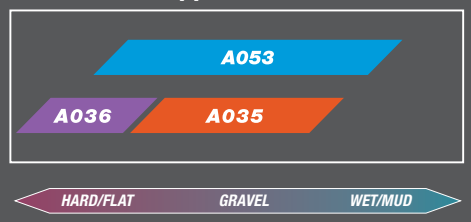




ADVAN A036

The A036 gravel rally tyre. Has strong construction with reinforced sidewalls, ideal for compacted, hard gravel stages. Motorsport UK - Tyre List 6.

INCH	SERIES	SIZE	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
15	60	185/60R15 84Q	N2446	601	187	206	6.5
	65	205/65R15 93Q	N2447	648	206	224	7



Road Surface Application Chart

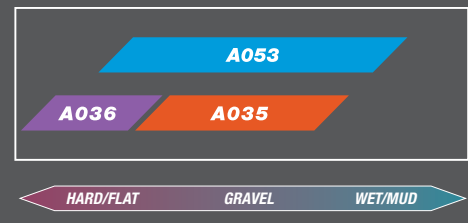

ADVAN A051T


The A051T asymmetrical asphalt rally tyre. Has strong construction offered in a range of compounds. Designed for dry/intermediate conditions but can be cut to a wet pattern.

INCH	SIZE	COMPOUND			OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
		SUPER SOFT	SOFT	MEDIUM				
18	210/650R18	N2934	N2935	N2936	648	208	224	8
17	210/625R17	N3035	N3036	N3037	624	209	221	8
	190/625R17	N2974	N2975	N2976	625	185	200	7
16	190/600R16	N2955	N2956	N2957	600	185	198	6.5
15	190/580R15	N3038	N3039	N3040	581	186	196	6.5

A051T COMPOUND MAP

Road Temperature (C°)	SS Distance					
	~10 km	~20 km	~30 km	~40 km	~50 km	50 km~
60	H	H	H	H	H	H
50	M	M	H	H	H	H
40	S	M	M	M	M	H
30	S	S	S	M	M	M
20	S	S	S	S	M	M
10	SS	S	S	S	S	S
0	SS	SS	S	S	S	S
-10	SS	SS	SS	S	S	S

Hand-cut Groove Recommendation

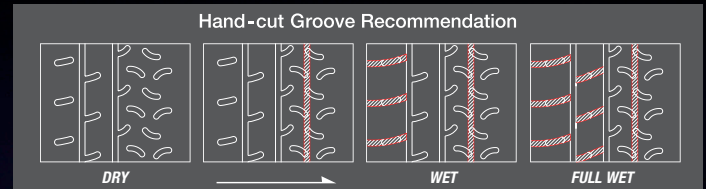

RACING TYRES

RADIAL



ADVAN
A005

“YOKOHAMA PROVIDE THE BEST” Supported by a continuous development programme offering you the definitive choice in compound and construction for all forms of motorsport.

INCH	SIZE	PATTERN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
13	160/520R13	A005	N2669 / N2701*	523	160	186	6
	190/515R13	A005	N2706 / N2763	514	192	227	8
	200/50VR13	A005	N3005	556	210	244	9
	240/45VR13	A005	N3006	577	260	278	10
15	190/580R15	A005	N2655/N2358	576	206	216	7
16	190/580R16	A005	N2454	581	196	203	7
	210/580R16	A005	N2465	580	216	227	8
17	210/610R17	A005	N2614/N2202	608	222	224	8
	230/610R17	A005	N2794/N2795	607	231	240	9
	230/625R17	A005	N2383	620	225	247	8
	260/640R17	A005	N2392	640	253	275	10
18	250/650R18	A005	N2596/N2372	650	269	273	10

* = Wet compound hand cutting required

ADVAN



Radial wet weather race tyre with a moulded tread pattern, recommended for circuit use.



ADVAN
A006

INCH	SIZE	PATTERN	COMPOUND	OVERALL DIAMETER (mm)	TREAD WIDTH (mm)	SECTION WIDTH (mm)	RECOMMENDED RIM WIDTH
13	200/50VR13	A006C	N3126	557	210	244	9
	240/45VR13	A006C	N3127	579	260	276	10
15	190/580R15	A006G	N2148	578	194	210	7
17	210/610R17	A006N	N2610	612	212	222	8
	230/610R17	A006G	N2337	607	236	244	9
18	250/650R18	A006N	N2320	653	250	270	10



A BRIEF HISTORY OF MOTORSPORT: WINNING IN RED AND BLACK

YOKOHAMA has been active in Motorsports for over half a century. Right from the beginning, we adopted a simple yet stunning black and red combination as our team colours. The combination represents our passion (red) and the asphalt (black) of the race track. The colouring became known as the “Red in Black ADVAN Colour”. Going forward, Motorsports will remain one of our core corporate activities, as we see the race track as an important venue for technological development as well as the ideal place to display the YOKOHAMA fighting spirit. YOKOHAMA is truly a household name within Motorsports and its range of ADVAN Tyres can provide the Control Tyre for World Championships and International top level Motorsport competitions.



YOKOHAMA, AS ONE OF THE LEADING TYRE MANUFACTURERS IN THE WORLD, IS AND HAS BEEN INVOLVED AT THE VERY TOP LEVEL OF PROFESSIONAL MOTORSPORTS AS OFFICIAL TYRE SUPPLIER FOR A WIDE RANGE OF CHAMPIONSHIPS AROUND THE WORLD.

YOKOHAMA USER INFORMATION

YOKOHAMA is the name that should come to mind for the racing enthusiasts that want the best tyre to meet their needs. We offer a wide range of tyres for almost every automotive competition. Regardless of your area of interest, we have teams of professionals working year-round in the development, testing and manufacture of new tyre designs that provide the additional edge you need to lead the field.

Tyre Use

YOKOHAMA recommends using YOKOHAMA Motorsports tyres only for the intended uses for each pattern, and please remember such tyres are made for competition and therefore carry no warranty.

Tyre Size Designation

Tyre size designation shows normal tread width in mm / overall tyre diameter in mm and nominal rim diameter in inch (e.g.230/610R17). The dimensions of a competition tyre are given as an inflated tyre with unloaded conditions.

Tyre Care

Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders, and etc. Tyres should preferably be stored in a cool, dry and dark room with a controlled environment.

Mounting

Motorsports tyres require special care when being mounted, as the bead must seat perfectly onto the rim without causing any damage. Wheels should be checked for damage or rust before mounting as such items may result in a poor fit that is not airtight. In order to assure that there is no damage to the bead area, you should always have your tyres mounted by a certified dealership that knows how to handle tyres made for competition. You should always use a mounting machine when changing a tyre to prevent unnecessary damage to the tyre or wheels. A safety cage should always be used when inflating tyres. Failure to do so may result in serious injury. Do not inflate a tyre to more than 40 psi (275 kPa).

Air Pressure

Tyre pressure is an unpredictable variable, as the driving feeling varies depending on the needs of each driver and the surface conditions of the circuit. Of course, you should never over or under-inflate as this may cause severe damage to tyres and/or rims when accelerating, braking or cornering. Remember that the proper pressure depends on the type of race, road surface conditions and drivers needs. An over- or under-inflated tyre may cause severe damage to the tyre and /or rims when accelerating, braking or cornering. Never use tyres with under 19 psi (130 kPa). Remember that the proper pressure depends on the type of race, road surface conditions and driver's needs.

Tyre Pressures

The correct tyre inflation pressure is an important requirement for the tyre to obtain its peak tread life and performance characteristics. Under inflation causes excessive heat, reduces load carrying capacity, increases tread wear which results in a loss of performance. Whilst over inflation results in irregular wear rates, rapid wear in the centre of the tyre and light steering characteristics. It's recommended that all tyres are pressured from cold.

Temperatures

Tyre operating temperatures are the result of the following variables: Car, weight, drive system, weather, driver, track suspension and geometry. To obtain maximum performance together with consistency and durability it's essential to monitor tyre temperature.

Technical Information

Whilst every effort has been made to make sure that technical details are correct some of these specifications may vary occasionally.

APPROVED MOTORSPORT DEALERS '22



Historic / Race

ADAMS & PAGE

Cressex Industrial Est. Lincoln Road,
High Wycombe, Bucks HP12 3RQ
Tel: 01494 445 389
Fax: 01494 473 302
www.adamsandpage.co.uk
info@adamsandpage.co.uk

Race

BLACK N ROUNDS

Unit 6 Silverstone Park West,
Buckingham Road, Silverstone
Towcester NN12 8TJ
Tel: 01327 858 044
tyres@blacknrounds.com

DARKSIDE DEVELOPMENTS

Unit 1 Carbon Court, Springvale Road,
Barnsley, South Yorkshire S72 7FF
Tel: 01226 827999
www.darksidedevelopments.co.uk

Race / Rally

DEMON TWEEDS

75 Ash Road South, Wrexham
Industrial Est., Wrexham,
Clywd LL13 9UG
Tel: 01978 664 466
Fax: 01978 664 467
www.demon-tweeds.co.uk
wheels@demon-tweeds.co.uk

Oval / Race / Hillclimb

GEORGE POLLEY M/SPORT

Wimblington Road, Manea,
Cambridgeshire PE15 0JR
Tel: 01354 688 111
Fax: 01354 688 333
www.polleymotorsport.co.uk
sales@polleymotorsport.co.uk

Rally / Race Scotland

WHEELS AROUND

21 Feus, Auchteradar,
Perthshire PH3 1EP
Tel: 07711 577148
Fax: 01764 661 127
www.wheelsaround.com
fiona@wheelsaround.com

Rally / Race Ireland

MURRAY MOTORSPORT

Unit 21, Beechlawn Ind. Estate,
Greenhills Road Dublin 12
Tel: +353 1 4500 555
info@murraymotorsports.ie

TMG DISTRIBUTION

25 Main Street Fintona,
County Tyrone, Northern Ireland
BT78 2AA
Tel: 02882 841227
tmgdist@ireland.com

Rally / Race

MR TYRE (MOTORSPORT) LTD

Unit 1 Apex Centre, Lovell,
Litchfield Road Ind. Estate,
Tamworth B79 7TA
Tel: 01827 211021
sales@mrtyremotorsport.com
www.mrtyremotorsport.co.uk

MINISPORT LIMITED

Thompson Street, Padham,
Lancashire BB12 7AP
Tel: 01282 778 731
Fax: 01282 772 043
sales@minisport.com

Motorsport Dealers

BRIDGE TYRES & WHEELS (Motorsport)

Unit 5 Tonedale Industrial Estate,
Milverton Road, Wellington,
Somerset TA21 0AN
Tel: 01823 664494
Fax: 01823 336 433
bridge.wellington@gmail.com

CAMSKILL PERFORMANCE TYRES

Pottery Road, Off Couch Road,
Whitehaven, Cumbria CA28 9BZ
Tel: 01946 518 202
Fax: 0870 253 4298
www.camskill.co.uk
enquiries@camskill.co.uk

CYRIL WILCOX

Peplow, Nr. Hodnet, Market
Drayton, Shropshire TF9 3JY
Tel: 01630 685 219
Fax: 01630 685 600
www.powerandstyle.com
rus@cyrilwilcoxandsons.co.uk

GARAGE-D

Unit 5 Blueprint Commercial Centre,
Watford, Hertfordshire WD24 4JP
Tel: 01923 251588
www.garage-d.com
info@garage-d.com

FAIRFIELD MOTORSPORT

Cefn Ydfa, Coytrahen, Bridgend,
Mid Glamorgan CF32 0EG
Tel: 01656 725 000
Fax: 01656 725 062
judith@fairfieldmotorsport.com

GUILDFORD TYRE COMPANY

13-14 Woodbridge Meadows,
Guildford, Surrey GU1 1BA
Tel: 01483 562 300
Fax: 01483 461 927
matt@guildfordtyre.co.uk

MIKE STOKES MOTORSPORT

1053 Wimborne Road, Moordown,
Bournemouth, Dorset BH9 12BY
Tel: 01202 547 555
mike@mikestokes.net

NORTH WALES RALLY CENTRE

Glandon Garage, Caernafon Road,
Pwllheli, Gwynedd LL53 5LF
Tel: 01758 613 402
glandoncarsales@btconnect.com

TYRES SOUTH SHORE

57 Cowley Road, Marton,
Blackpool, Lancashire FY4 4NE
Tel: 01253 761 362
Fax: 01253 798 919
www.tyressouthshoreltd.co.uk
zismek@aol.com

WEST WALES RALLY SPARES

Unit 11, Parc Mentre,
Llandysul Enterprise Parc,
Llandysul, Wales SA44 4JL
Tel: 01559 363 731
Fax: 01559 363 308
sales@westwalesrallyspare.co.uk

DEALER STAMP



For further details of Yokohama's full range of race proven motorsport and rally tyres, please contact the motorsport helpline:

Tel: +44 (0) 1908 625 625
Fax: +44 (0) 1908 625 637

motorsport@yokohama.co.uk
www.yokohama.co.uk

YOKOHAMA H.P.T. Ltd, Motorsport Divisions,
Dawson Rd, Mount Farm, Bletchley, Milton Keynes MK1 1QY