YOKOHAMA

WINTER TYRE CATALOGUE 2025/2026

PCR / SUV / LIGHT COMMERCIAL VEHICLES + ALL SEASON



ADVAN WINTER V907

For information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue.
You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

YOKOHAMA

NORDIC WINTER TYRE CATALOGUE 2025/2026

PCR / SUV / LIGHT COMMERCIAL VEHICLES







For information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue.
You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

This is YOKOHAMA

The Global Tyre Brand since 1917
The YOKOHAMA Rubber Group is composed of the YOKOHAMA Rubber Co., Ltd. and 143 consolidated subsidiaries, 8 unconsolidated subsidiaries and 36 affiliates around the world.

Original Equipment

YOKOHAMA tyres have been adopted worldwide by car manufacturers with a global reputation and in a wide range of vehicle categories, being the Tyre supplier for premium cars.



The BluEarth Concept

BluEarth. The Product Engineering Philosophy, which focuses on the idea of responsibility towards the Environment and Society constantly.



BluEarth

Our Philosophy, to keep the focus on the responsibility towards the Environment and Society.

The E+ Concept

By displaying the E+ mark, we clearly indicate to customers which products are compatible with electric vehicles so that they are able to choose the right tyre.



E+

The Mark of YOKOHAMA EV Tyres

Truly Global & Environmental

As a responsible acting company, taking care of our planet is part of the overall YOKOHAMA philosophy.



For information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue. You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

YOKOHAMA

YOKOHAMA Nordic Friction Tyres



IG53

iceGUARD Studless iG53

For Passenger Cars



IG60 IG60A

iceGUARD Studless iG60

For Passenger Cars



G075

iceGUARD Studless G075

For SUVs and 4x4s

YOKOHAMA Stud Tyres



IG65

iceGUARD Stud iG65

For Passenger Cars and SUVs

YOKOHAMA High Performance Winter Tyres

New



V907

ADVAN WINTER V907

For Passenger Cars, BEVs and SUVs



V906

BluEarth-WINTER V906

For Passenger Cars



V906 SUV

BluEarth-WINTER V906 SUV

For SUVs



WY01

WY01

For Van and Light Commercial Vehicles

The availability of products and the special size range offered can vary from country to country.
For detailed information about the available products and sizes offered in your country, please ask you local distributor or dealer. For general information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue. You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

YOKOHAMA High Performance Winter Tyres



V907

ADVAN WINTER V907

For Passenger Cars, BEVs and SUVs



V906

BluEarth-WINTER V906

For Passenger Cars



V906 SUV

BluEarth-WINTER V906 SUV

For SUVs

YOKOHAMA Light Commercial Vehicle Tyres



WY01

WY01

For Van and Light Commercial Vehicles

YOKOHAMA All Season Tyres



G061

GEOLANDAR CV 4S

All Season Tyres for Crossover SUVs



AW21

BluEarth-4S AW21

All Season Tyres for Passenger Cars and SUVs



RY61

BluEarth-Van All Season RY61

All Season Tyres for Vans and Light Commercial Vehicles

The availability of products and the special size range offered can vary from country to country.
For detailed information about the available products and sizes offered in your country, please ask you local distributor or dealer. For general information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue. You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

Open the gate to Winter Drives

New



ADVAN WINTER V907

M+S

max. 270 km/h

Maximum speed
270 km/h in case of W speed symbol
240 km/h in case of V speed symbol
(Speed symbol varies depending on size)

0E
Original Equipment

EU Label Range

Fuel Efficiency Class	C–D
Wet Grip Class	B–C
External Rolling Noise Class and Measured Value (dB)	B 70–73
Series: 70 % – 35 %	Inches: 14–22

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Please ask your local distributor or dealer for available sizes.

Application: Ultra-High-Performance Cars, BEVs and SUVs

Benefits

- A tyre for premium BEVs, Passenger Cars and SUVs
- Focus of construction on ground contact area and grip
- Supple ground contact and maneuverability

Features

- A highly robust structure for maneuverability
- Large ground contact area for traction in snow and wet
- The belt structure provides a supple ground contact characteristic

Tread Pattern Design

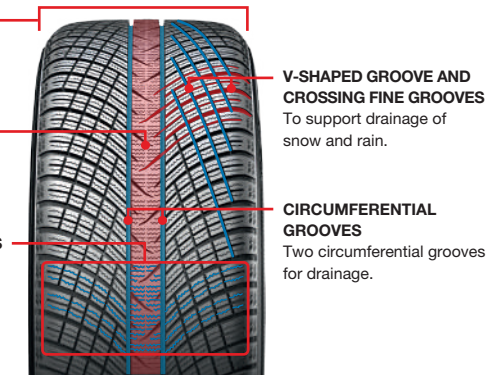

Construction

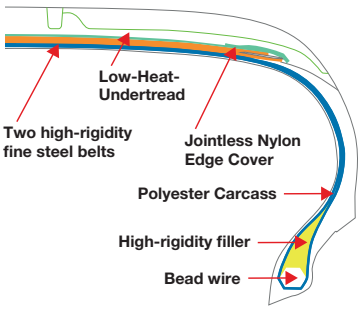

Highly robust structure
for maneuverability.

A belt structure
that achieves a supple ground contact characteristic.

Low-Heat-Undertread
aiming to support fuel efficiency.

Large ground contact area



Large ground contact area
to improve the grip on the tyre surface, for snow and wet traction.

Maximised edge effect
of the sipe.

Original Equipment: AMG E-Class (BR214)

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Winter Traction



V906

Please ask your local distributor or dealer for available sizes.

BluEarth *WINTER V906

M+S

BluEarth

max. 270 km/h

Maximum speed
270 km/h in case of W speed symbol
240 km/h in case of V speed symbol
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)

Application: Compact Cars, Middle sized cars

Benefits

- Aiming to reduce the risk of aquaplaning
- Designed for Mileage

Features

- Harmony Tread Design Concept
- Super rich-silica compound
- Robust Construction

Harmony Tread Design Concept



UNIFORM PRESSURE BLOCKS
Each block is positioned in a uniform manner. The pressure from the ground is spread evenly.

SMOOTH V-SHAPED GROOVE
Smooth-angled V-shape helps displace water and snow. This to reduce the risk of aquaplaning.

WIDESPREAD 3-D SIPE
The 3-D sipes are spread out widely from block to block to enhance the edge effect on snow.

EU Label Range	
Fuel Efficiency Class	C–D
Wet Grip Class	B–C
External Rolling Noise Class and Measured Value (dB)	B 70–74
Series: 65 %–30 %	Inches: 15–22

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

SUV Tyres

Traction inspires Confidence



V906 SUV

Please ask your local distributor or dealer for available sizes.

BluEarth *WINTER V906 SUV

M+S

BluEarth

max. 270 km/h

Maximum speed
270 km/h in case of W speed symbol
240 km/h in case of V speed symbol
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)

Application: Modern SUVs & CUVs

Benefits

- Designed for Mileage
- Super Rich-Silica Compound for snow and wet performance

Features

- Harmony Tread Design Concept
- Super rich-silica compound
- Robust Construction

Super Rich-Silica Compound

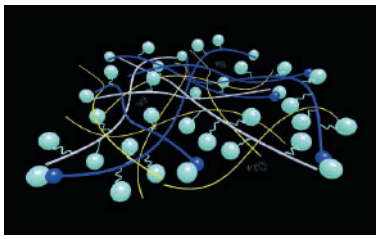

- A large amount of silica is used to contribute to the wet performance.
- Snow polymer is blended for snow performance.

EU Label Range	
Fuel Efficiency Class	C–D
Wet Grip Class	B
External Rolling Noise Class and Measured Value (dB)	B 70–75
Series: 70 %–30 %	Inches: 16–23

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Nordic Friction Tyre



Please ask your local distributor or dealer for available sizes.

iceGUARD Studless iG53

M+S

Depend on size

max. 210 km/h

Maximum speed
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)

EU Label Range	
Fuel Efficiency Class	C–D
Wet Grip Class	E
External Rolling Noise Class and Measured Value (dB)	B 69–73
Series: 65 %–30 %	Inches: 15–21

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Application: Passenger Cars

Benefits

- Resistance to wear
- Enhanced tyre contact with the ground for traction
- Directional Tread Design

Features

- 3-D Triple Sipes
- Low-Heat-Generating Under Tread

Directional Tread Pattern



3-D Triple Sipes



The surfaces of 3-D sipes avoid uneven deflection of blocks by supporting each other (maximised actual contact area).

Low-Heat Generating Under Tread



Tread compound consist of two layers of rubber, “Cap Compound” and “Under Tread Compound”. The low-heat generating under tread compound increases stiffness.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Ground Contact for Fast Reaction



IG60 IG60A

iceGUARD Studless iG60

M+S

Depend on size

max. 160 km/h

Maximum speed
160 km/h in case of Q speed symbol
(Speed symbol varies depending on size)

BluEarth

EU Label Range	
Fuel Efficiency Class	C–E
Wet Grip Class	E
External Rolling Noise Class and Measured Value (dB)	B 70–73
Series: 80 %–35 %	Inches: 13–20

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Please ask your local distributor or dealer for available sizes.

Application: Passenger Cars

Benefits

- Enhanced tyre contact with the ground
- Tread Pattern Design aims to improve friction and snow evacuation

Features

- An Asymmetric Tread Design
- Quattro 3-D Dimple Sipes
- Double Micro Grooves
- Low-Heat-Generating Under Tread

Tread Pattern Design

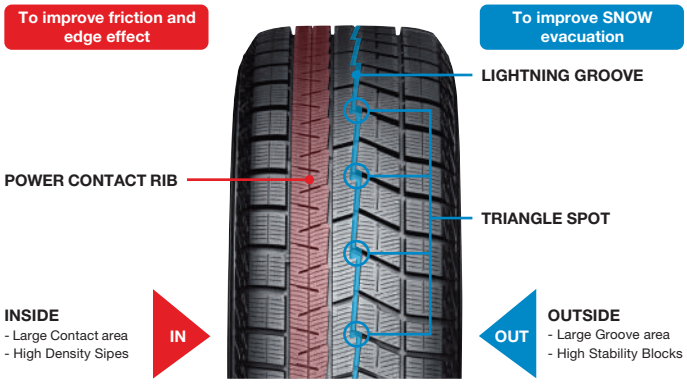

Sipe arrangements

The Surface of “Quattro 3-D Dimple sipes” aims to avoid uneven deflection of blocks by supporting each other. It delivers maximised actual contact area.

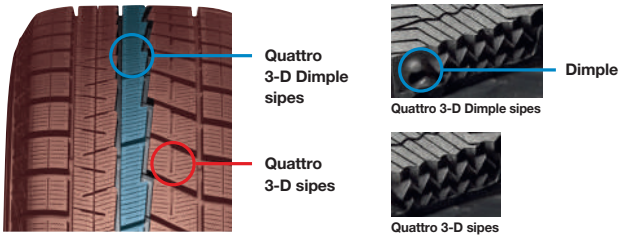

Double Micro Grooves

“Double Micro Grooves” to deliver winter performance even without a break-in-period.

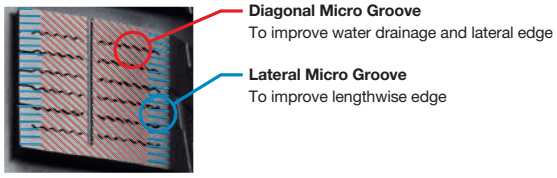

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Tyre for your SUV



Please ask your local distributor or dealer for available sizes.

iceGUARD Studless G075

M+S

Depend on size

BluEarth

max. 210 km/h

Maximum speed
210 km/h in case of H speed symbol
160 km/h in case of Q speed symbol
(Speed symbol varies depending on size)

EU Label Range	
Fuel Efficiency Class	C–E
Wet Grip Class	C–E
External Rolling Noise Class and Measured Value (dB)	A–B 68–74
Series: 80 %–30 %	Inches: 15–20

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Application: Modern SUVs

Benefits
- Increased contact area for winter roads
- Long-life grip

Features
- 3-D Triple Sipes
- Low-heat-generating tread compound

Directional Tread Pattern

The tread pattern is aiming to increase the contact area and to maximise the edge effect.



3-D Triple Sipes



The surfaces of 3-D sipes avoid uneven deflection of blocks by supporting each other (maximised actual contact area).

Micro Diagonal Sipes



Micro diagonal sipes deliver edge effect and ice performance even without a break-in period.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Premium Studded Tyre with Winter Grip



iceGUARD Stud iG65

M+S

max. 190 km/h

Maximum speed
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)

Tyre Labelling:
Tyre bears the snow grip pictogram even if the EU Tyre Label does not apply to stud tyres iG65.

Please ask your local distributor or dealer for available sizes.

Application: Performance cars, SUVs and middle sized cars

Benefits
- Tread Pattern balanced for winter conditions
- Designed for stud retention and winter braking performance

Features
- Original stud model
- Aggressive and directional tread pattern and fixed rotating direction

IG65 directional tread design



Original stud model





Wide polygon tip
(winter performance)

Broad Axe Body
(winter performance)

Multiple projected flange
(retention performance)

Stud Number and hole allocation



Stud Number: **172 studs**

Hole allocation: **20 lines**

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

The Tyre to transcend all Seasons

GEOLANDAR CV 4S



G061

Please ask your local distributor or dealer for available sizes.

M+S

BluEarth

max. 240 km/h

Maximum speed
240 km/h in case of V speed symbol
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)

EU Label Range	
Fuel Efficiency Class	C
Wet Grip Class	B–C
External Rolling Noise Class and Measured Value (dB)	B 71–74
Series: 70 %–45 %	Inches: 16–22

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Application: Crossover SUVs,
Performance Crossover SUVs

Benefits

- All Season Tyre
- Design Focus on Snow and Wet Performance

Features

- Asymmetric Tread design based on snow pattern
- Powerful side Design with highlighted logo and black letters
- Nylon Full Cover of the belt for Durability
- Tread Lug Grooves and Sipes for Snow Performance

Asymmetric Pattern Design for WET, SNOW and DRY

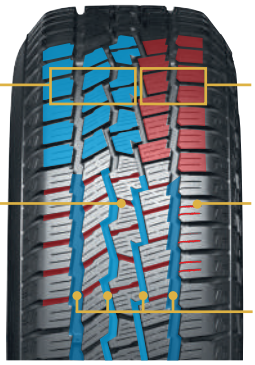

INSIDE TREAD
For WET and SNOW Traction.

OUTSIDE TREAD
For DRY Performance.

LUG GROOVES
For WET and SNOW Traction.

3-D-SHAPED SIPES
For WET and SNOW Traction.

4 ZIG-ZAG GROOVES
For Anti-Hydroplaning, WET and SNOW Traction.

Compound Technology

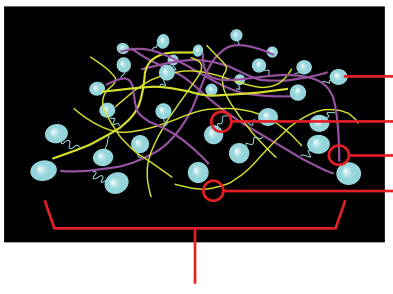

Micro Silica

Improved Silica dispersion

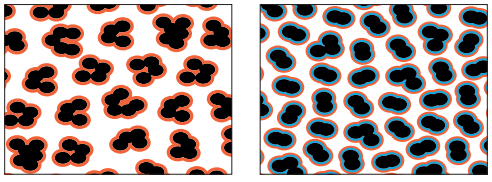

Conventional YOKOHAMA Product

GEOLANDAR CV 4S

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

The One for All Seasons

BluEarth-4S AW21



AW21

Please ask your local distributor or dealer for available sizes.

M+S

max. 300 km/h

Maximum speed
300 km/h in case of Y speed symbol
270 km/h in case of W speed symbol
240 km/h in case of V speed symbol
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
(Speed symbol varies depending on size)

EU Label Range	
Fuel Efficiency Class	C–D
Wet Grip Class	B–C
External Rolling Noise Class and Measured Value (dB)	B 70–73
Series: 70 % – 35 %	Inches: 14–22

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Application: Small and Compact cars, mid-size sedan, modern SUVs & CUVs

Benefits
- Advanced compound for snow, wet and dry
- Grip in winterly conditions (snow)
- Sound braking performance on wet & dry summer roads
- Constructed for mileage performance

Features
- Divergent V-Groove
- Flat & Wide Contour
- Silica End-locked compound

Tread Pattern Design

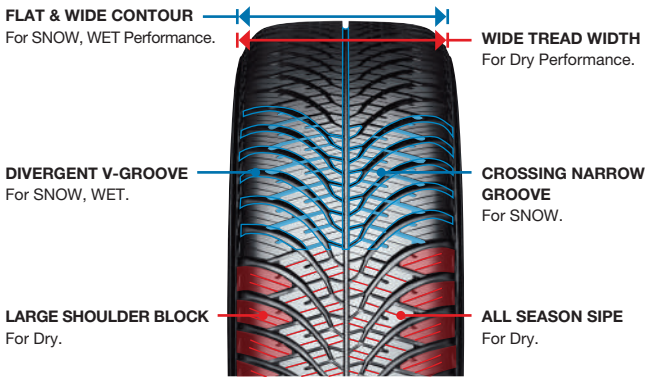

Compound
for SNOW/WET Performance

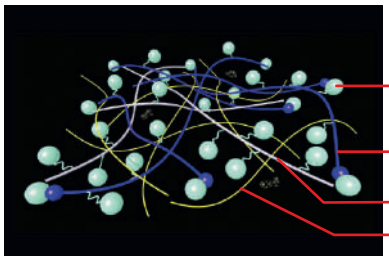

Tyre Contour

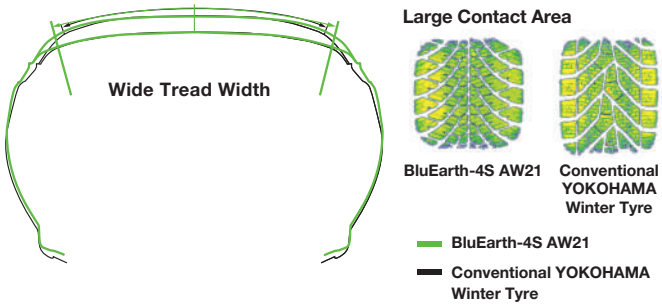

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Strong and Smooth – Whatever the Season

BluEarth-Van All Season RY61



Please ask your local distributor or dealer for available sizes.

M+S

max. 210 km/h

Maximum speed
210 km/h in case of H speed symbol
190 km/h in case of T speed symbol
170 km/h in case of R speed symbol
(Speed symbol varies depending on size)

EU Label Range	
Fuel Efficiency Class	C–D
Wet Grip Class	B
External Rolling Noise Class and Measured Value (dB)	B 73
Series: 75 %–55 %	Inches: 15–17

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Application: Transporters, Light Commercial Vehicles, Cargos and Modern Vans

Benefits

- Constructed for mileage performance
- Strong and smooth drive on various road conditions, all year round
- Focus on Wet Performance

Features

- Remarkable Tread Design
- Compound for toughness
- Construction: Bead Flipper

RY61 Tread Pattern



TOUGH CENTER BLOCKS
Large Blocks placed in the center, creating rigidity and large contact area with ground, preventing irregular wear.

TRIPLE WIDE & DEEP GROOVES
To enhance snow/water evacuation, for Snow and Wet Performance.

STRAIGHT GROOVES
For smooth water drainage.

SQUARE SHOULDER BLOCK
Wide Contact Area for cornering, preventing irregular wear by high rigidity.

SNOW BITING SIPES
Scratch snow for snow performance.

CENTER ZIG-ZAG GROOVE
Creating edges to snow, crossing Wide Lugs creating shear force.

Compound

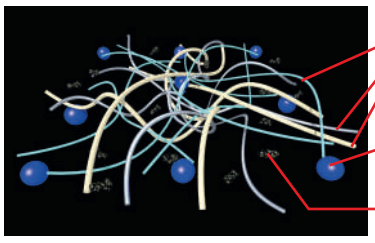

Triple Polymer
Strong & tough polymers for tread life. Resistance to uneven wear, cut and chip.

Silica
Large amount of Silicas are used to support Wet Performance.

Carbon

Construction



Bead Flipper

For anti-burst

For driving stability

- Aims to prevent wear of bead & carcass in high load
- Keeps bead filler from falling

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

Durability and Confidence with Winter Performance for Light Commercial Vehicles



WY01

Please ask your local distributor or dealer for available sizes.

WY01

M+S

max. 190 km/h

Maximum speed
190 km/h in case of T speed symbol
170 km/h in case of R speed symbol
160 km/h in case of Q speed symbol
(Speed symbol varies depending on size)

EU Label Range	
Fuel Efficiency Class	E
Wet Grip Class	B–C
External Rolling Noise Class and Measured Value (dB)	B 71–72
Series: 82 %–60 %	Inches: 14–17

These values are for the full size range of this product. The special size range offered can vary from country to country.
For detailed information on the sizes offered and the relevant parameters in your country, please ask your local distributor or dealer.

Application: Transporters, Light Commercial Vehicles, Cargos and Modern Vans

Benefits
- Direct-feel and traction
- Remarkable durability performance

Features
- 3 wide grooves
- Traction Blocks with micro diagonal sipes
- Rigid shoulder rib with lug

WY01 Tread Pattern



Traction Blocks with Micro Diagonal Sipes



Providing “direct-feel” and “traction”. Diagonal Shallow slits on the tyre tread surface provide performance even in the break-in period.

Rigid Shoulder Rib with Lug



Moderating stiffness blocks help even wear for long mileage.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

EU Tyre Label

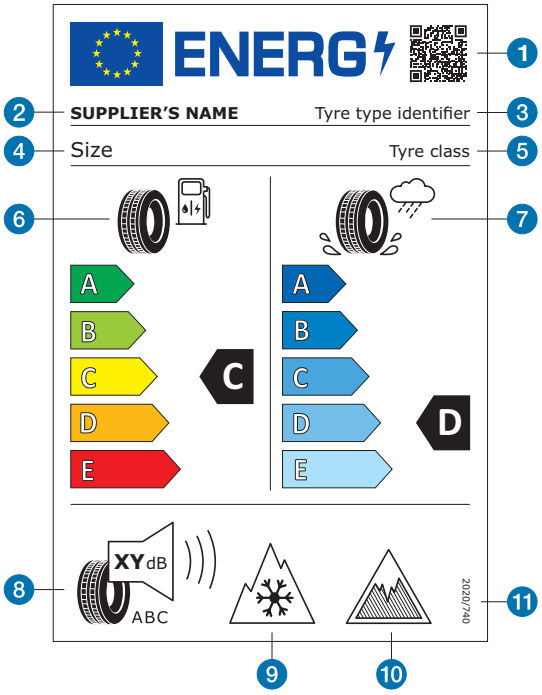

Since 2012 the EU Tyre Energy Label provides a clear and common classification of tyre performance for rolling resistance, braking on wet surfaces and external noise. The labels help consumers make informed decisions when they are buying tyres as they can easily set their priority choice based on the parameters.

Regulation (EC) No 1222/2009 first introduced the obligation of placing car and van tyres on the EU market with a sticker showing the label. That regulation was repealed and replaced by Regulation (EU) 2020/740 with start of application on 1 May 2021. It established a framework for the provision of harmonised information on tyre parameters through labelling to allow end-users to make an informed decision when purchasing tyres, for the purpose of increasing economic and environmental efficiency of road transport by promoting fuel-efficient, safe tyres with low noise levels.

Tyres are no longer allowed in classes F and G for rolling resistance and for wet grip, which is why the new scale has only 5 classes (A to E). The new energy symbols better suggest that the fuel efficiency is applicable to both internal combustion vehicles and to electric ones. In the bottom part, the external rolling noise class is always indicated, including the measured value of external noise level in decibels.

1. QR Code
2. Trade name or trademark of the supplier
3. Tyre type identifier = Article number in case of YOKOHAMA
4. Tyre size designation, load capacity index and speed category symbol
5. Tyre class: i.e. C1, C2 or C3
6. Fuel efficiency pictogram, scale and performance class
7. Wet grip pictogram, scale and performance class
8. External rolling noise pictogram, value (expressed in dB and rounded to the nearest integer) and performance class
9. Snow grip pictogram
10. Ice grip pictogram (C1 tyres only)
11. The serial number of this Regulation: "2020/740"



Fuel Efficiency Class
The fuel efficiency class ranges from A (most efficient) to E (least efficient). A top class tyre has less rolling resistance and therefore requires less energy to move the vehicle. This translates into lower energy costs (fossil fuels or electricity).



Wet Grip Class
The wet grip describes a tyre's performance under wet conditions and its classes ranges as well from A (shorter braking distance on wet asphalt) to E (longest).



External Rolling Noise Class and Measured Value (dB)
The external rolling noise class ranges from A (less noise outside the vehicle) to C (highest noise). The external rolling noise, caused by tyres, is measured in decibels. This noise is different from the "cavity noise", which is the noise transmitted from the rims to the interior of the car.

Under the new regulation, in addition to the previous tyre label, there are also options for including an icon relating to grip on icy conditions and/or severe snow conditions in the bottom part of the tyre label (next to the external rolling noise pictogram) for tyres which satisfy the minimum snow grip index values or the relevant minimum ice grip index values.





Tyres suitable for severe snow conditions bear the snow grip pictogram ("3 Peak Mountain Snowflake") or "alpine" symbol that is also present on the sidewall of such tyres. Nordic winter tyres (tyre class C1) for use on iced surfaces will feature a symbol (ice grip pictogram) that represents an ice stalagmite.

The QR code, to read with a smartphone or other suitable reader, is intended to provide this and additional information for each individual tyre type identifier via a link to the public part of the new European product database for Energy Labelling (EPREL). A link to this database is also provided via the YOKOHAMA website (www.yokohama.eu).
You can also get the information of the database in printed form from your tyre dealer.

Other components of the label are the trade name or the trade mark of the supplier, the tyre type identifier, the tyre size designation, the load-capacity index and the speed category symbol, the tyre class and furthermore the serial number of the regulation (in the bottom part of the tyre label).

Technical Information / For Your Comfort & Safety

Aspect ratio

The aspect ratio is the ratio of a tyre's section height (H) to its section width (W).

$$\text{Aspect ratio (\%)} = \frac{H}{W} \times 100$$



Speed category symbol

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed category symbol	Speed (km/h)
N	140
P	150
Q	160
R	170
S	180
T	190
H	210
V	240
W	270
Y	300
(Y)	over 300

Load-capacity index

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

LI	kg
61	257
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450

LI	kg
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800

LI	kg
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400
121	1450
122	1500
123	1550

Reinforced (Extra Load) Indication

Passenger car tyres designed for loads and inflation pressures higher than the standard version.

Tyre rotation

Tyre rotation is the regular practice of changing the position of each tyre on the car to minimise abnormal (or uneven) tread wear, which may cause:

1. Abnormal vibration ("shimmy")
2. Tyre noise
3. Decreased riding comfort
4. Shorter tyre life

Note: We recommend that you rotate your tyres immediately if you recognise any of the above-mentioned conditions (especially on your front tyres).



Tyres suitable for severe snow conditions bear the snow grip pictogram ("3 Peak Mountain Snowflake") or "alpine" symbol that is also present on the sidewall of such tyres. Nordic winter tyres (tyre class C1) for use on iced surfaces will feature a symbol (ice grip pictogram) that represents an ice stalagmite.

Example of ISO notation of radial tyre

325/35ZR22 114Y

① ② ③ ④ ⑤ ⑥

① 325: Nominal section width (mm)
② 35: Aspect ratio (%)
③ ZR: Speed category (over 240 km/h) and construction code (Radial)
④ 22: Nominal rim diameter (inch)
⑤ 114: Load-capacity index (1180 kg)
⑥ Y: Speed category symbol (300 km/h)

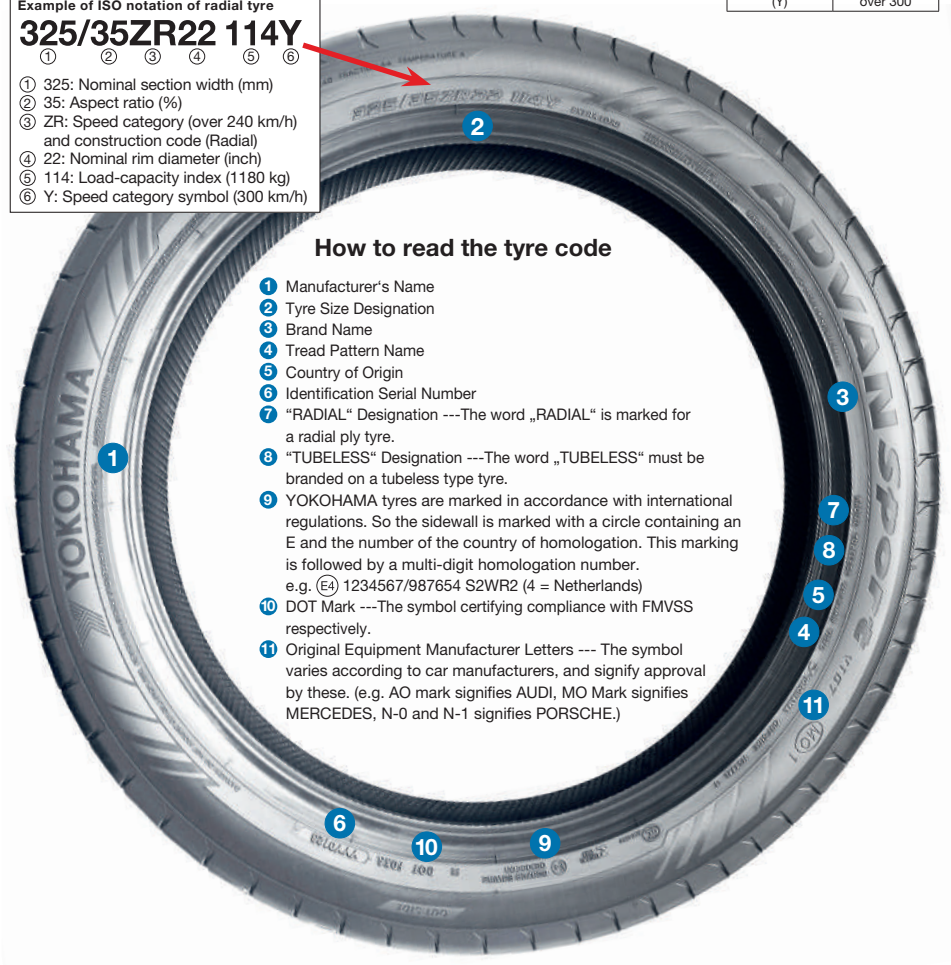

Sample tyre for explanation

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.
- Never inflate beyond 275 kPa (2.75 bar, 40 psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or constructions on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on a highway and / or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation is dangerous and could lead to accidents or tyre damage.
- Check tyre inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other foreign objects stuck in the tyre treads may damage the tyre. Remove foreign objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, kerbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, YOKOHAMA recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in a safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your tyre dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyres should not be driven over 80 km/h for the first 100 km.
- When driving on winter roads, sudden starts and quick stops should be avoided, and a safe car-to-car driving distance should be maintained.
- When using tyre chains, be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad. To preserve traffic safety, YOKOHAMA recommends driving substantially slower under adverse weather or road conditions.

Fuel saving and road safety depend heavily on the behaviour of drivers and in particular on the following: eco driving can significantly reduce fuel consumption; tyre pressure needs to be regularly checked to optimise fuel efficiency and wet grip; stopping distances must always be respected.

Ice grip tyres are specifically designed for road surfaces covered with ice and compact snow, and should only be used in very severe climate conditions (e.g. cold temperatures). Using ice grip tyres in less severe climate condition (e.g. wet conditions or warmer temperatures) could result in sub-optimal performance, in particular for wet grip, handling and wear.

Never use a tyre under the following conditions and replace tyres immediately:

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with a controlled environment.

Important notice for use of Runflat tyre (ZPS)

- A vehicle must be equipped with a tyre pressure monitoring system.
- After a low pressure warning has been indicated:
  - do not exceed 80 km/h (50 mph).
  - do not travel more than 80 km (50 miles).
  - do not re-inflate after run flat operation and do not repair.

Tread Wear Indicator



Triangle marks(▲)
on the sidewall show the tread groove position of the "tread wear indicators", the "tread wear indicators" represent 1.6 mm of remaining tread depth at which time the tyre should be replaced.

Constructions and specifications are subject to change with or without notice.
For information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue. You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

Technical Information / For Your Comfort & Safety

Aspect ratio

The aspect ratio is the ratio of a tyre's section height (H) to its section width (W).

$$\text{Aspect ratio (\%)} = \frac{H}{W} \times 100$$



Load-capacity index

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

LI	kg
61	257
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450

LI	kg
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800

LI	kg
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400
121	1450
122	1500
123	1550

Speed category symbol

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed category symbol	Speed (km/h)
N	140
P	150
Q	160
R	170
S	180
T	190
H	210
V	240
W	270
Y	300
(Y)	over 300

Reinforced (Extra Load) Indication

Passenger car tyres designed for loads and inflation pressures higher than the standard version.

Tyre rotation

Tyre rotation is the regular practice of changing the position of each tyre on the car to minimise abnormal (or uneven) tread wear, which may cause:

1. Abnormal vibration ("shimmy")
2. Tyre noise
3. Decreased riding comfort
4. Shorter tyre life

Note: We recommend that you rotate your tyres immediately if you recognise any of the above-mentioned conditions (especially on your front tyres).



Tyres suitable for severe snow conditions bear the snow grip pictogram ("3 Peaks Mountain Snowflake") or "alpine" symbol that is also present on the sidewall of such tyres. Nordic winter tyres (tyre class C1) for use on iced surfaces will feature a symbol (ice grip pictogram) that represents an ice stalagmite.

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.
- Never inflate beyond 275 kPa (2.75 bar, 40 psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or constructions on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on a highway and / or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation is dangerous and could lead to accidents or tyre damage.
- Check tyre inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other foreign objects stuck in the tyre treads may damage the tyre. Remove foreign objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, kerbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, YOKOHAMA recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in a safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your tyre dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyres should not be driven over 80 km/h for the first 100 km.
- When driving on winter roads, sudden starts and quick stops should be avoided, and a safe car-to-car driving distance should be maintained.
- When using tyre chains, be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

The local regulations for the proper usage of Car Tyres may differ from country to country. Please make sure to check foreign regulations carefully, before going abroad.

To preserve traffic safety, YOKOHAMA recommends driving substantially slower under adverse weather or road conditions.

Fuel saving and road safety depend heavily on the behaviour of drivers and in particular on the following: eco driving can significantly reduce fuel consumption; tyre pressure needs to be regularly checked to optimise fuel efficiency and wet grip; stopping distances must always be respected.

Ice grip tyres are specifically designed for road surfaces covered with ice and compact snow, and should only be used in very severe climate conditions (e.g. cold temperatures). Using ice grip tyres in less severe climate condition (e.g. wet conditions or warmer temperatures) could result in sub-optimal performance, in particular for wet grip, handling and wear.

Never use a tyre under the following conditions and replace tyres immediately:

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with a controlled environment.

Important notice for use of Runflat tyre (ZPS)

- A vehicle must be equipped with a tyre pressure monitoring system.
- After a low pressure warning has been indicated:
  - do not exceed 80 km/h (50 mph).
  - do not travel more than 80 km (50 miles).
  - do not re-inflate after run flat operation and do not repair.

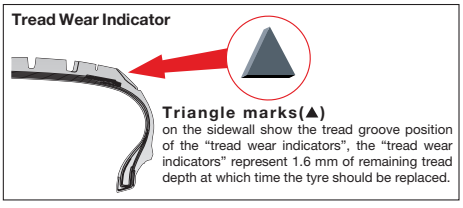

Constructions and specifications are subject to change with or without notice.
For information about the EU Tyre Label, label range data and further technical details, please see the corresponding sections inside this catalogue. You can also refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

How to read the tyre code

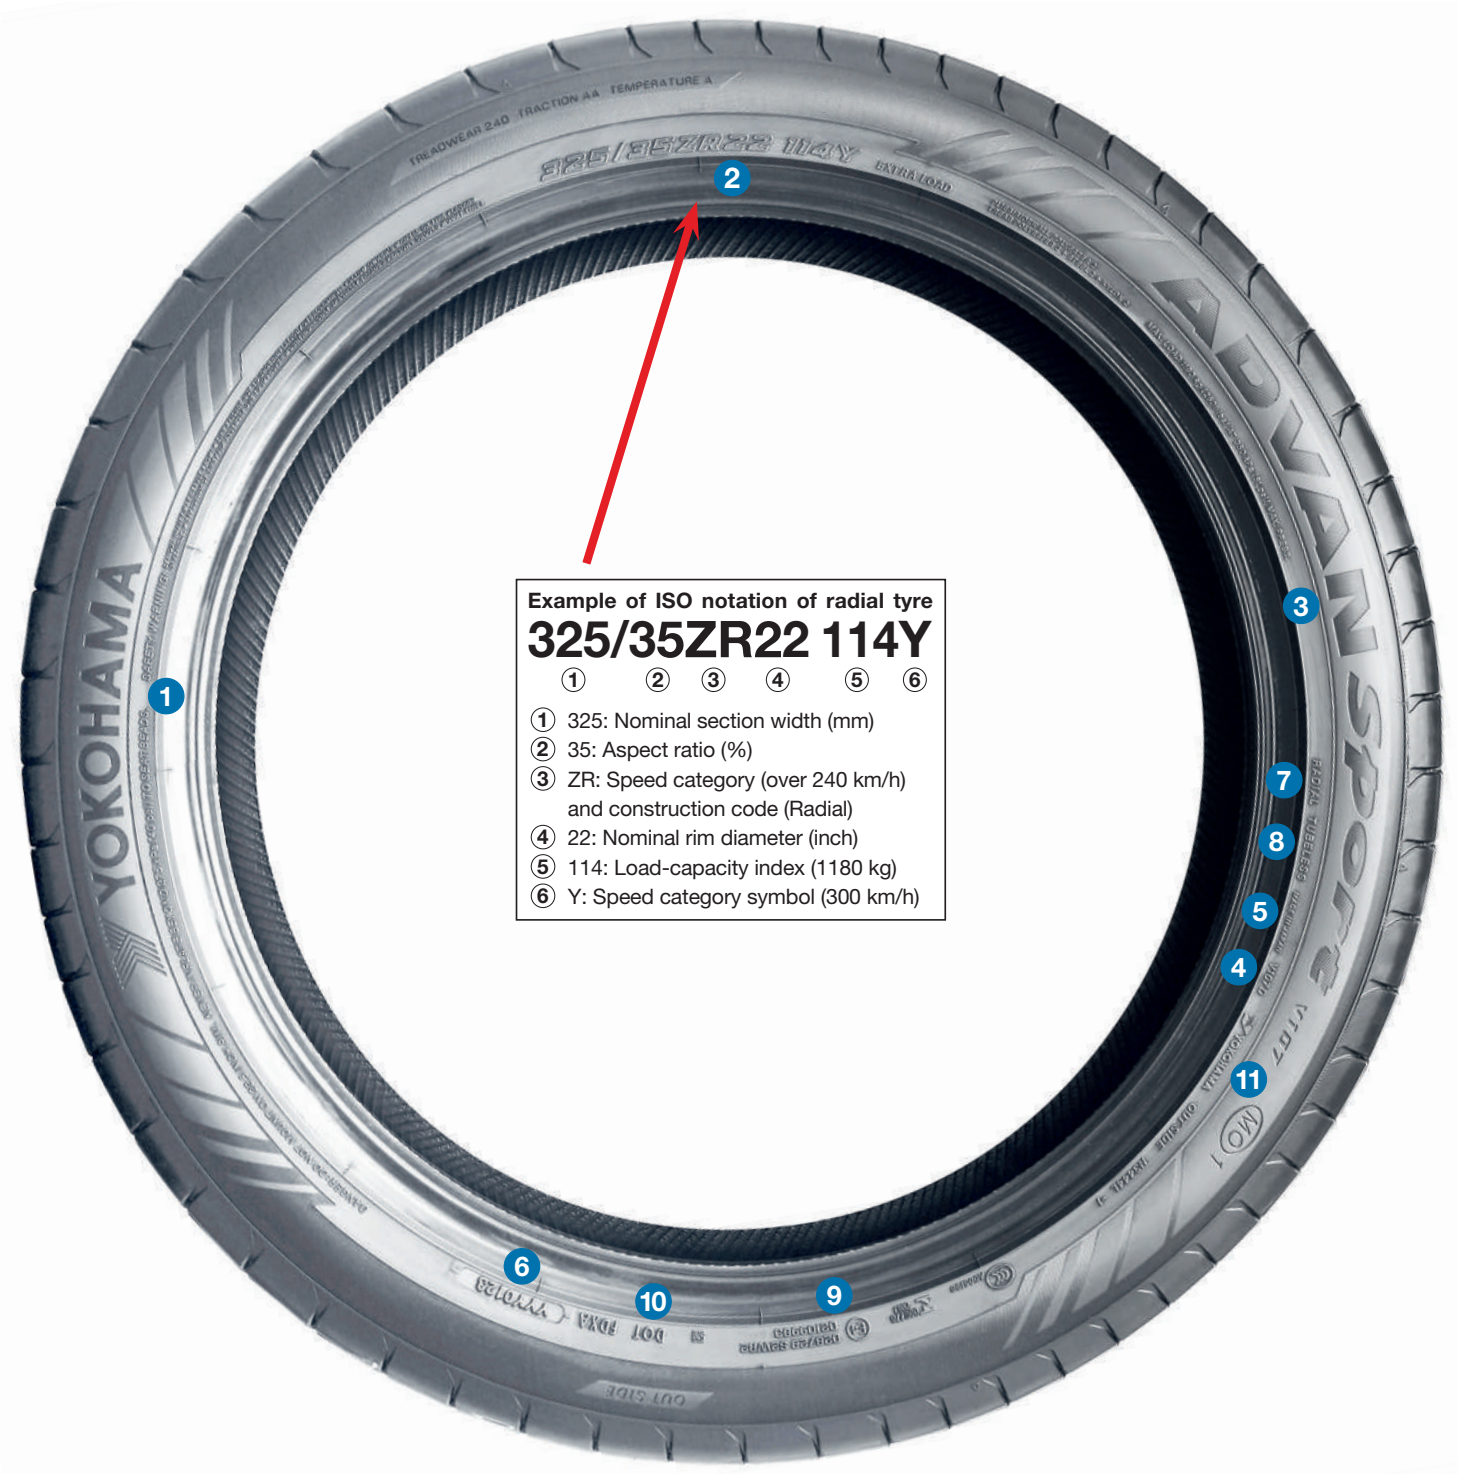

Sample tyre for explanation

1. Manufacturer's Name
2. Tyre Size Designation
3. Brand Name
4. Tread Pattern Name
5. Country of Origin
6. Identification Serial Number
7. "RADIAL" Designation ---The word "RADIAL" is marked for a radial ply tyre.
8. "TUBELESS" Designation ---The word "TUBELESS" must be branded on a tubeless type tyre.
9. YOKOHAMA tyres are marked in accordance with international regulations. So the sidewall is marked with a circle containing an E and the number of the country of homologation. This marking is followed by a multi-digit homologation number. e.g. E4 1234567/987654 S2WR2 (4 = Netherlands)
10. DOT Mark ---The symbol certifying compliance with FMVSS respectively.
11. Original Equipment Manufacturer Letters --- The symbol varies according to car manufacturers, and signify approval by these. (e.g. AO mark signifies AUDI, MO Mark signifies MERCEDES, N-0 and N-1 signifies PORSCHE.)

NOTES



DRIVE THE GAME

ATP TOUR | YOKOHAMA

OFFICIAL TYRE PARTNER

For information about the EU Tyre Label, label range data and further technical details, please refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

YOKOHAMA

PUBLISHED BY: YOKOHAMA EUROPE GMBH
ERRORS AND OMISSIONS EXCEPTED. DATA TIMELINESS: 04/2025
www.yokohama.eu

CE316
ABC

01



DRIVE THE GAME

ATP TOUR | YOKOHAMA

OFFICIAL TYRE PARTNER

For information about the EU Tyre Label, label range data and further technical details, please refer to the YOKOHAMA website www.yokohama.eu (not for country specific product and size availability).

YOKOHAMA

PUBLISHED BY: YOKOHAMA EUROPE GMBH
ERRORS AND OMISSIONS EXCEPTED. DATA TIMELINESS: 04/2025
www.yokohama.eu

CE315
ABC

01